



Valena™ Life Connected starter pack

Cat. No(s): 7 521 96 - 7 522 96 - 7 523 96
7 521 86 - 7 522 86 - 7 523 86

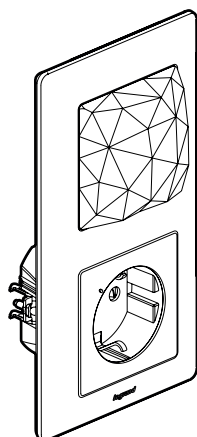

7 521 96



7 521 86

1. USE

This pack enables you to create a connected installation in your home. It can be used to control lighting, roller shutters and electrical equipment plugged into connected sockets:

- using your smartphone and the Home + Control app
- using voice assistants
- from the general control at the entrance to your home

Comprises:

• A Control socket (Zigbee relay/WiFi)

Installation in 1-gang box 40 mm deep (minimum), instead of a standard socket outlet.

Claw and/or screw fixing.

Connected socket which can be controlled by a wireless lighting control and/or remotely via your smartphone.

The socket can be used to measure instantaneous and total consumption of the connected device, which can be viewed on the Home + Control app.

One-piece mechanism (grid + mechanism).


• A wireless general control, used to control leaving home/coming home scenes involving lights, roller shutters and connected sockets.

- Fixes directly on the wall or screws onto a flush-mounting box. Multi-gang versions can be combined with other wiring accessories.
- Fits on a piece of furniture (movable).


2. RANGE

Description	White	Ivory	Aluminium
German standard connected relay socket. Supplied complete with finishing plate and site protection cover. Equipped with a RESET button (hidden) used to return to factory settings.	7 521 96	7 522 96	7 523 96
Additional wireless general control. Supplied complete with battery, finishing plate. Equipped with an LED indicator (configuration) and a RESET button (hidden) used to return to factory settings. Repositionable self-adhesive fixings supplied.	7 521 86	7 522 86	7 523 86

3. DIMENSIONS (mm)


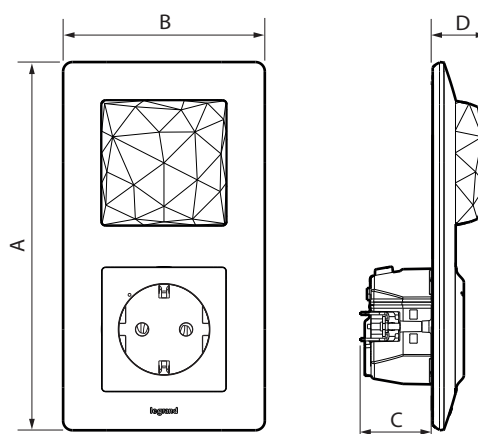


Cat. Nos	A	B	C	D
7 521 96 - 7 522 96 - 7 523 96	157	86	31.5	23

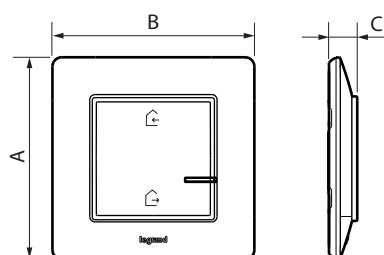

Cat. Nos	A	B	C
7 521 86 - 7 522 86 - 7 523 86	86	86	12

4. OPERATION

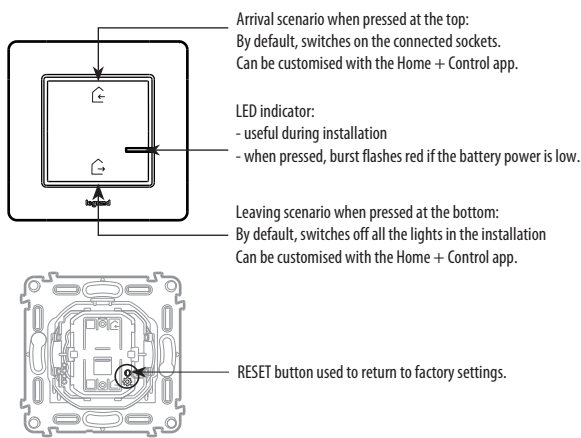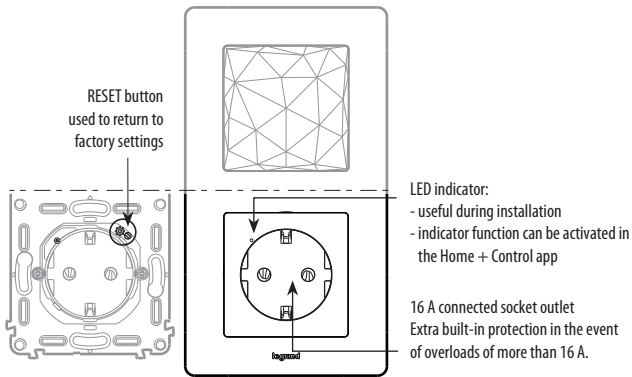

⚠ The starter pack is pre-paired at the factory. Never perform a factory RESET on the control socket and the wireless general control at the same time, as this may render them unusable.

5. CONNECTION

Control socket

Terminal type: automatic
Terminal capacity: 2 x 2.5 mm²
Stripping length: 11 mm

6. TECHNICAL CHARACTERISTICS

6.1 Mechanical characteristics

Control socket:

Protection against impacts: IK 04
Protection against solid bodies and/or liquids:
IP 20 without cover plate and plate
IP 40 assembled product

General control:

Protection against impacts: IK 02
Protection against solid bodies and/or liquids:
IP 20 without rocker plate and plate
IP 40 for assembled product

6.2 Material characteristics of control socket

Colour	White RAL 9003	Ivory RAL 1013	Aluminium
Plate	ABS	ABS	ABS
Cover plate	PC	PC	PC

Sub-plate: PC
Mechanism casing: PC
Support: Fibreglass-reinforced (20 %) PC Grey RAL 7016

Halogen-free
UV resistant

Self-extinguishing:
850°C/30 s for insulating components holding live parts in place.
650°C/30 s for other insulating components.

6.3 Material characteristics of general control

Colour	White RAL 9003	Ivory RAL 1013	Aluminium
Plate	ABS	ABS	ABS
Rocker	ABS	ABS	ABS

Sub-plate: PC
Mechanism casing with grid: Fibreglass-reinforced (10 %) PC
Halogen-free
UV resistant
Self-extinguishing: 650° C / 30 s

6.4 Electrical characteristics of control socket

Voltage: 110/230 V~
Current: 16 A
Power: 3680 W max.
Frequency: 50/60 Hz
Standby consumption: 0.1 mA

ZigBee radio technology frequency: 2.4 GHz to 2.4835 GHz
Power level: < 100 mW
Range: 200 m of unobstructed space
10 m recommended between products indoors

6.5 Electrical characteristics of general control

Powered by a CR2032 - 3 V lithium battery (supplied)
Battery life: 8 years for 10 activations a day

ZigBee radio technology frequency: 2.4 GHz to 2.4835 GHz
Power level: < 100 mW

6.6 Climate characteristics

Storage temperature: 0°C to +45°C
Usage temperature: +5°C to +45°C

7. CARE

Clean the surface with a cloth.
Do not use acetone, tar-removing cleaning agents or trichloroethylene.

Resistant to the following products: Hexane (EN 60669-1), methylated spirit, soapy water, diluted ammonia, bleach diluted to 10%, window-cleaning products, pre-impregnated wipes.

The plates must not be painted.

Caution: Always test before using special cleaning products.



Take care to recycle the battery appropriately.

8. ACCESSORIES

0 648 71: Repositionable adhesive for wireless control (x 4 supplied)

9. STANDARDS AND APPROVALS

The undersigned, LEGRAND, declares that the radio-electric equipment type (7 521 96 - 7 522 96 - 7 523 96 - 7 521 86 - 7 522 86 - 7 523 86) complies with directive 2014/53/EU.

The full text of the EU declaration of conformity is available on the following website: www.legrandoc.com