


**Céliane™**  
**Touch-control switch with no neutral 400 W**


Cat. No(s): 670 41




**1. USE**

For switching lights on or off with only the lightest stroke.


**2. RANGE**

	Description	Cat. No.	Weight (g)
	Touch-control switch with no neutral 400 W	<b>670 41</b>	57.6

**3. OVERALL DIMENSIONS**

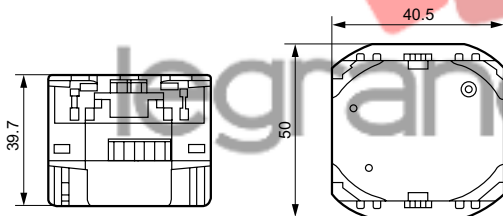

**4. FITTING**

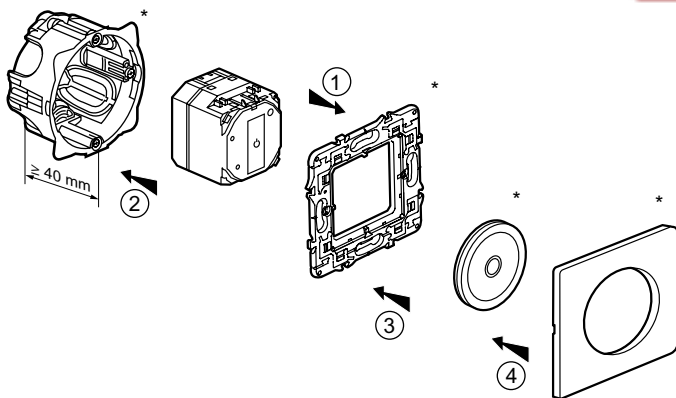

\* not supplied with the mechanism


**4. FITTING (cont'd)**

- 1 - The mechanism is clipped to the support from the back.
- 2 - The mechanism/support assembly is screwed to the flush-mounting box
- 3 - The rocker is clipped to the mechanism
- 4 - The plate is clipped to the support  
Can be fitted with the full range of Céliane finishes.  
Vertical or horizontal multi-gang mounting.


**5. CONNECTION**

Number of terminals: 3  
Terminal type: with screws  
Terminal capacity: 2 x 1.5 mm<sup>2</sup> or 1 x 2.5 mm<sup>2</sup>  
Tool: flat screwdriver 3.5 mm  
or Philips No. 1  
or Posidriv No. 1  
or mixed size 0  
Stripping length: 8 mm

**5.1 Connection of lighting point**



**5.2 Connection combined with one or several mechanical push-buttons**

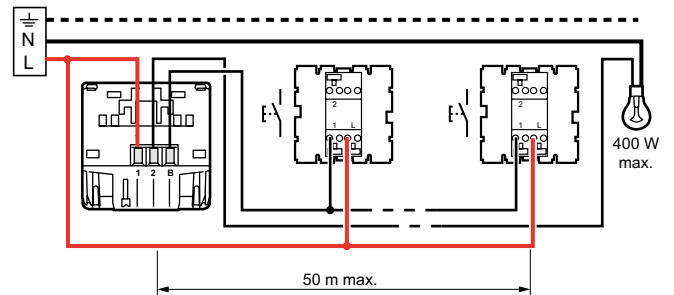

## Touch-control switch with no neutral 400 W

## 6. TECHNICAL DATA

## 6.1 Mechanical characteristics

Impact tests: IK 04

Penetration by solid/liquid bodies: IP 20

} no rocker

## 6.2 Material characteristics

Cover: Polycarbonate





Base: Polycarbonate

## 6.3 Electrical characteristics

Self-extinguishing: 650°C / 30 s

Voltage: 100-240 V

Frequency: 50/60 Hz

	①	②	③	④
				
240 V	Max. 400 W	400 W	400 VA	400 VA
	Min. 40 W	40 W	40 VA	40 VA
100 V	Max. 200 W	200 W	200 VA	200 VA
	Min. 40 W	40 W	40 VA	40 VA

1 - Incandescent lamp

2 - Halogen lamp

3 - ELV halogen lamp with ferromagnetic transformer

4 - ELV halogen lamp with electronic transformer

## 6.4 Climatic characteristics

Storage temperatures: -10°C to +70°C

Operating temperatures: -5°C to +50°C

## 7. CLEANING

No cleaning