




# Forix™ IP 2X 2 P+E German socket

#### Cat. No.(s): 7 824 11/13/18/20/23/41/43/48/50/53



7 824 11/20/41/50





# 1. USE


General 16 A german socket outlet. Horizontal or vertical mounting for sockets multiple.

#### 2. RANGE


Designation	es	Finishes	
Designation	lvory	White	
1 2 P+E socket without shutters	7 824 41	7 824 11	
2 x 2 P+E socket without shutte	7 824 43	7 824 13	
0 2 P+E socket with shutters	7 824 50	7 824 20	
3 2 x 2 P+E socket with shutters	7 824 53	7 824 23	
8 3 x 2 P+E socket with shutters	7 824 48	7 824 18	


# 3. OVERALL DIMENSIONS (continued)

#### ■ 3.1 Single base




#### 3. OVERALL DIMENSIONS (mm)






Cat. No.	Α	В	С
7 824 11/20/41/50	65	65	38.5
7 824 13/23/43/53	65	110	38.5
7 824 18/48	65	155	38.5

■ 3.2 Double base




#### 3. OVERALL DIMENSIONS (continued)

#### ■ 3.3 Triple base

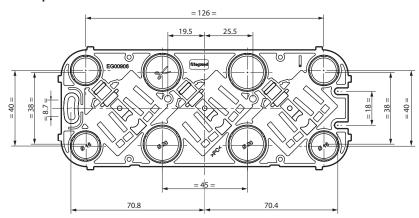

#### 4. CONNECTION

#### Information for pre-cut:



Cat. No.	Pre-cut sides (mm)			
- 16	A 25 x16	B 31 x 16	C 40 x 16	D 15 x 10
7 824 11/20	2		al l	2
7 824 41/50	E 20 x 10	F 25 x 10	G Ø 16	H Ø 5
	2	-	2	2
	A 25 x16	B 31 x 16	C 40 x 16	D 15 x 10
7 824 13/23	-	2	2	1
7 824 43/53	E 20 x 10	F 25 x 10	G Ø 16	H Ø 5
	2	-	2	2
	A 25 x16	B 31 x 16	C 40 x 16	D 15 x 10
7.024.10/40	-	4	4	1
7 824 18/48	E 20 x 10	F 25 x 10	G Ø 16	H Ø 5
	2	-	2	4

Stripping: 11 mm Terminal type: with screws Terminal capacity up to: 2 x 2.5 mm<sup>2</sup> Recommended screwdriver size: pozidrive No 2 Recommended tightening torque: 0.8 Nm

#### **5. TECHNICAL CHARACTERISTICS**

#### ■ 5.1 Mechanical characteristics

Protection against liquids:

- For Cat. Nos 7 824 11/13/41/43: IP 20
- For Cat. Nos 7 824 18/20/23/48/50/53: IP 21 Impact tests: IK 04

# ■ 5.2 Material characteristics

Cover: PP

Cover for Cat. No 7 824 18/48: PC

Mechanism: PC

### ■ 5.3 Electrical characteristics

Voltage: 250 VAC Current: 16 A

■ **5.4 Climatic characteristics**Storage and use temperature: - 25° C to

# 6. CLEANING

Surface cleaning with a cloth.

Do not use: acetone, tar remover, trichloroethylene.

Resistance to the following agents: Hexane (EN 60669-1), Methylated spirits, Soapy water, Diluted ammonia, Diluted pure bleached 10%, Glass cleaning substance, Pre-impregnated wipes.

Caution: A preliminary test should be carried out if other specific cleaning products are to be used.