



Valena™ Life - Valena™ INMATIC Changeover push-button 6 A


Cat. No(s): 7 520 11/13/17/18/24 - 7 521 11/12/13/14/15/16/18/24
7 522 11/12/13/15/16/18/24 - 7 523 11/12/13/15/16/18/24



7 521 11



7 521 14



7 520 13

1. USE


Lighting controls mechanisms 6 A.
Mechanisms supplied with protection cover.
To be equipped with plates one or several gangs.
Flush-mounting or surface-mounting.
Screw or claw fixing.

2. RANGE


Description	Mechanism + Cover plate			Mechanism only	Cover plate only		
	White	Ivory	Aluminium		White	Ivory	Aluminium
Changeover push-button NO-NC	7 521 11	7 522 11	7 523 11	7 520 11	7 550 00	7 550 01	7 550 02
Changeover push-button NO-NC free contact	-	-	-	7 520 17	-	-	-
Changeover push-button NO-NC, bell symbol	7 521 15	7 522 15	7 523 15	7 520 11	7 550 10	7 550 11	7 550 12
Pull cord changeover push-button NO-NC	7 521 24	7 522 24	7 523 24	7 520 24	-	-	-
Illuminated changeover push-button NO-NC with indicator Cat. No 0 676 86 (230 V)	7 521 12	7 522 12	7 523 12	7 520 11	7 551 00	7 551 01	7 551 02
Illuminated label-holder push-button NO-NC with indicator Cat. No 0 676 86 (230 V)	7 521 14	7 521 14	7 521 14	7 520 11	7 551 10	7 551 10	7 551 10
Two-gang changeover push-button NO-NC	7 521 18	7 522 18	7 523 18	7 520 18	7 550 20	7 550 21	7 550 22
Two-gang changeover push-button NO-NC with indicator Cat. No. 0 676 86 (230 V)	-	-	-	7 520 18	7 552 20	7 552 21	7 552 22
Two-gang multifunctional switch	7 521 21	7 522 21	7 523 22	-	-	-	-
Two-gang illuminated multifunctional switch with indicator Cat. No 0 676 86 (230 V)	7 521 22	7 522 22	7 523 22	-	-	-	-
Illuminated push-button 12 V	7 521 13	7 522 13	7 523 13	7 520 13	7 551 00	7 551 01	7 551 02
Illuminated label-holder push-button NO-NC with indicator Cat. No 0 676 87 (12 V)	7 521 14	7 521 14	7 521 14	7 520 11	7 551 10	7 551 10	7 551 10

3. DIMENSIONS (mm)

Cat. No 7 520 17

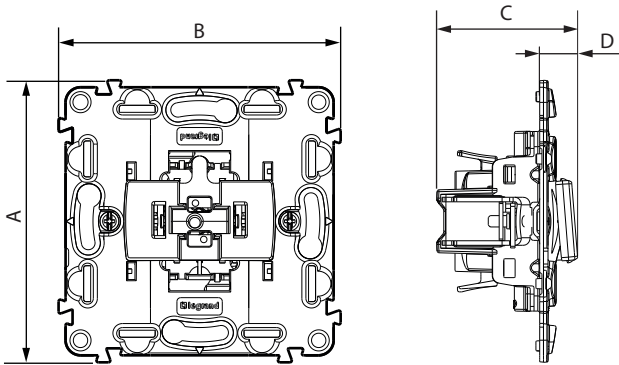

Cat. No 7 521 14

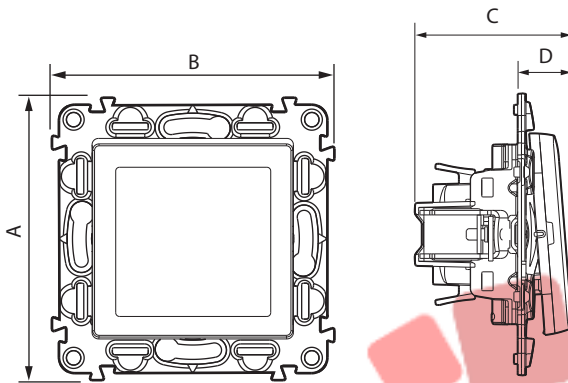

5. TECHNICAL CHARACTERISTICS

■ 5.1 Mechanical characteristics

Protection against solid bodies and liquids: IP 20
Protection against impact: IK 04

■ 5.2 Material characteristics

Polygloss appearance
Colour: - White RAL 9003
- Ivory RAL 1013
- Aluminium
Material: - Rocker: ABS
- Base: PC
- Halogen free
- UV resistant

Material of the support: - Polycarbonate grey RAL 7037 + Metal
- Halogen free

Self-extinguishing:

+ 850° C / 30 s for insulating parts holding live parts in place
+ 650° C / 30 s for other parts made of insulating materials

■ 5.3 Electrical characteristics

Voltage: 250 V~
Current: 6 A
Frequency: 50/60 Hz

■ 5.4 Climatic characteristics

Storage and use temperature: - 10° C to + 40° C

6. MAINTENANCE

Surface cleaning with a cloth.

Do not use: acetone, tar remover, trichloroethylene.

Maintenance with the following products: Hexane (EN 60669-1), Methylated spirit, Soapy water, Diluted ammonia, Bleach diluted to 10%, Window-cleaning products.

Caution: A preliminary test should be carried out if other specific cleaning products are to be used.

7. STANDARDS AND APPROVALS

Compliance with standards of installation and manufacturing.
Refer to e. catalogue.

4. CONNECTION

Type of terminals: automatic
Capacity: 2 x 2.5 mm²
Stripping length: 13 mm
Flexible or rigid cables compatible

References	A	B	C	D
7 521 11/12/13/15/16/18 7 522 11/12/13/15/16/18 7 523 11/12/13/15/16/18	75	75	41.5	14
7 521 24 - 7 522 24 - 7 523 24	75	75	52.5	25.5
7 520 11/13/17/18	75	75	37.5	10
7 520 24	75	75	37	7