



## Mosaic™ Cable outlets and branching device


Cat. No(s): 0 775 50/51/52/53 - 0 791 50L - 0 792 49



0 775 52



0 775 51



0 775 53


### 1. USE

Cable outlets and wires for cables of different diameters.  
 Mechanisms are flush-mounted or surface-mounted.

### 2. RANGE

	White	Alu	Matt Black
Branching device with 3 terminals 2 modules	0 775 53	-	-
Equipped cable outlet with cable clamps max. Ø to be used 12 mm, min. Ø to be used 4 mm 2 modules	0 775 51	-	-
Cable outlet with cable clamps max. Ø to be used 12 mm, min. Ø to be used 4 mm Authorized cables H05 VVF or H07 RNF 2 modules	0 775 50	0 792 49	0 791 50L
Wire outlet Ø 8 mm 1 module	0 775 52	-	-

### 3. DIMENSIONS (mm)

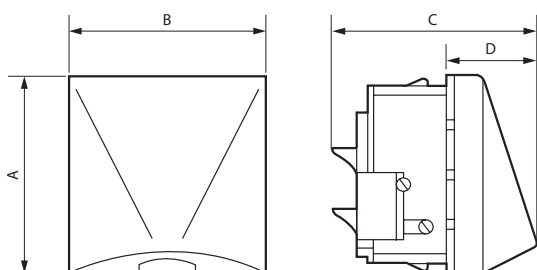

Cat. Nos	A	B	C	D
0 775 50 - 0 791 50L - 0 792 49	45	45	39	20
0 775 51	45	45	49.5	20
0 775 52	45	22.5	24.5	-
0 775 53	45	45	32.5	12.5

### 4. CONNECTION

#### Cat. No 0 775 51

Type of terminals: automatic  
 Stripping length: 12 mm  
 Cable cross-section: 4 x 2 x 1.5 mm<sup>2</sup>

#### Cat. No 0 775 53

Type of terminals: with screws  
 Stripping length: 12 mm  
 Cable cross-section: 6 x 2.5 mm<sup>2</sup>  
 Screwdriver: Philips n° 1

### 5. TECHNICAL CHARACTERISTICS

#### ■ 5.1 Mechanical characteristics

Protection against solid bodies and liquids: IP 41  
 Protection against impact: IK 04

#### ■ 5.2 Material characteristics

Base: PC  
 Cover plate:  
 Cat. No 0 775 52/53: PC White (RAL 9003)  
 Cat. No 0 775 50: ABS White RAL 9003  
 Cat. No 0 791 50L: ABS painted Matt Black satin finish RAL 9017  
 Cat. No 0 792 49: ABS painted Aluminium varnished glittery  
 Halogen free  
 UV resistant  
 Self-extinguishing: 650° C / 30 s

#### ■ 5.3 Electrical characteristics

Voltage: 250 V~  
 Current: 10 A for Cat No 0 775 51  
 20 A for Cat No 0 775 53

#### ■ 5.4 Climatic characteristics

Storage temperature: - 10° C to + 70° C  
 Use temperature: - 5° C to + 35° C

### 6. CLEANING

Surface cleaning with a cloth.

Do not use: acetone, tar remover, trichloroethylene.  
 Resistance to the cleaning agents: Hexane (NF C 61-314), Methylated spirit, Soapy water, Diluted ammonia, Diluted pure bleach 10%, Glass cleaning substances, Pre-impregnated wipes.  
 Anios, Surfianos, Bactily sine, Diluted hydrogen peroxide (35 %).

**Caution:** A preliminary test should be carried out if other specific cleaning products are to be used.

Cable outlets and branching device

7. STANDARDS AND APPROVALS

Compliance with standards of installation and manufacturing.  
See e.catalogue.

