



# Céliane™

## 4 AX - 6 AX two-way switches


Cat. No(s): 0 670 07/13/15/16




0 670 07



0 670 13



0 670 15



0 670 16


### 1. USE

Lighting control mechanisms with or without locating elements.  
 Multi mounting in horizontal and vertical.  
 Can be equipped with all Céliane finishes.

### 2. RANGE

Description	Cat. Nos
Two-way switch with indicator light, without neutral (with white LED) - Lever-type 1 gang	0 670 07
Two-way switch silent - Lever-type Mechanism supplied with rocker (only titanium finish) 1 gang	0 670 13
Two-way switch - Push-type Mechanism supplied with rocker (only titanium finish) ON/OFF mechanism by short press - 1 gang	0 670 15
Two-way switch - Lever-type Mechanism supplied with rocker (only titanium finish) 1 gang	0 670 16

### 3. DIMENSIONS (mm)

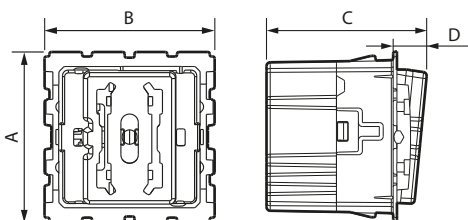

Cat. Nos	A	B	C	D
0 670 07	45	45	42.5	9
0 670 13	45	45	38.5	16.5
0 670 15	45	45	41	5
0 670 16	45	45	38.5	13

### 4. CONNECTION

Cat. Nos	Type of terminals	Terminal capacity	Stripping length
0 670 07	With screws	2 x 1.5 mm <sup>2</sup>	8 mm
0 670 13/16	automatic	2 x 2.5 mm <sup>2</sup>	13 mm
0 670 15	With screws	2 x 4 mm <sup>2</sup>	11 mm

### 5. TECHNICAL CHARACTERISTICS

#### ■ 5.1 Mechanical characteristics

Impact test: IK 04  
 Penetration by solid bodies and liquids: IP 20

#### ■ 5.2 Material characteristics

PC  
 Halogen free  
 Self-extinguishing:  
 + 850° C / 30 s for insulating parts holding live parts in place.  
 + 650° C / 30 s for other parts made of insulating materials.

#### ■ 5.3 Electrical characteristics

Cat. Nos	Current	Voltage
0 670 07	4 AX max. (60 W min.)	250 V~
0 670 13/15/16	6 AX	250 V~

#### ■ 5.4 Climatic characteristics

Storage temperature: - 10° C to + 70° C  
 Use temperature: - 5° C to + 50° C

### 6. CLEANING

Rocker Cat. No. 0 670 13/16:  
 Surface cleaning with a cloth.  
 Do not use: acetone, tar remover, trichlorethylene.

**Caution:** A preliminary test should be carried out if specific cleaning products are to be used.

### 6. STANDARDS AND APPROVALS

Compliance with standards of installation and manufacturing.  
 Refer to e. catalogue.