


Céliane™
16 AX 2-pole switch

Cat. No: 0 670 20




1. USE

General lighting control mechanism with or without an indicating component (indicator light).
 Horizontal and vertical multi-gang mounting.
 Can be equipped with the full range of Céliane finishes.

2. RANGE

Description	Cat. No.
2-pole switch For simultaneous breaking of phase and neutral. Can be illuminated (with bulb Cat. No. 6 650 90) or signalling (with bulb Cat. No. 6 650 91); takes cover plates (Cat. No. 0 680 21/23 White, Cat. No. 0 683 21/23 Titanium, Cat. No. 0 679 21/23 Graphite).	0 670 20

3. DIMENSIONS (mm)

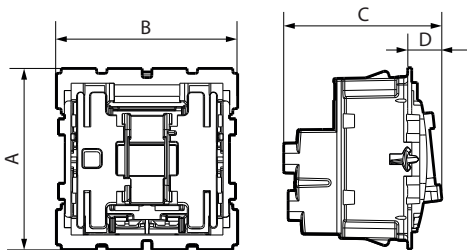


Cat. No.	A	B	C	D
0 670 20	45	45	39.5	8.5

4. CONNECTION


Terminal type: screw
 Terminal capacity: 2 x 4 mm²
 Stripping length: 10 mm
 Screwdriver: Posidrive No. 1 - Philips No. 1 - Flat 4 mm

5. WIRING

Illumination function: ensures the switch is visible in the dark

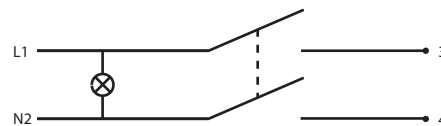

Signalling function: state of a circuit



6. TECHNICAL CHARACTERISTICS

- **6.1 Mechanical characteristics**
 Impact tests: IK 04
 Penetration by solid bodies and liquids: IP 31 D
- **6.2 Material characteristics**
 - Housing: Polycarbonate
 - Halogen-free
 Self-extinguishing:
 + 850 °C / 30 s for insulating parts holding live parts in place
 + 650 °C / 30 s for other parts made of insulating materials
- **6.3 Electrical characteristics**
 Voltage: 250 V~
 Current: 16 AX
- **6.4 Climatic characteristics**
 Storage temperature: -10 °C to +70 °C
 Operating temperature: -5 °C to +50 °C

7. ACCESSORIES

Illuminated indicator Cat. No. 6 650 90 (230 V - 0.15 mA)
 Signalling indicator Cat. No. 6 650 91 (230 V - 3 mA)

8. STANDARDS AND APPROVALS

Compliance with installation and manufacturing standards.
 See e-catalogue