


Céliane™
Anodised-finish plates

Cat. No(s): 0 689 00/01/02/03/04/05/06/07/08/09/11/12/13/14/15/18/19
 0 689 21/22/23/24/26/28/29/31/32/33/34/35/36/38/39
 0 689 41/42/43/44/45/48/49/51/52/53/54/55/58/59/68/69

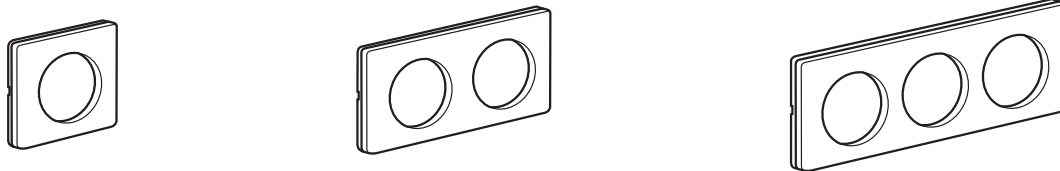

1. USE


Frame plates for fitting on mechanisms, 1 to 4-gang.

2. RANGE


Description	1 module	1 poste	2 postes	3 postes	4 postes	4/5 modules
Plate aluminium colour		0 689 21	0 689 22	0 689 23	0 689 24	0 689 25
Plate titanium colour	0 689 00	0 689 01	0 689 02	0 689 03	0 689 04	0 689 05
Plate mica colour		0 689 41	0 689 42	0 689 43	0 689 44	0 689 45
Plate copper colour		0 689 11	0 689 12	0 689 13	0 689 14	0 689 15
Plate cobalt colour		0 689 51	0 689 52	0 689 53	0 689 54	0 689 55
Plate graphite colour		0 689 31	0 689 32	0 689 33	0 689 34	0 689 35
Weight (g)	7	20	35	46	64	30

Description	Special to renovation					
	6/8 modules	2 postes entraxes 57 mm	3 postes entraxes 57 mm	Plaque spéciale	2 x 2 postes	2 x 3 postes
Plate aluminium colour	0 689 26	0 689 28	0 689 29			
Plate titanium colour	0 689 06	0 689 08	0 689 09	0 689 07	0 689 68	0 689 69
Plate mica colour		0 689 48	0 689 49			
Plate copper colour		0 689 18	0 689 19			
Plate cobalt colour		0 689 58	0 689 59			
Plate graphite colour	0 689 36	0 689 38	0 689 39			
Weight (g)	38.5	29	41	45.7	52	70


3. OVERALL DIMENSIONS (mm)




Cat. No 0 689 07



Cat. No 0 689 68

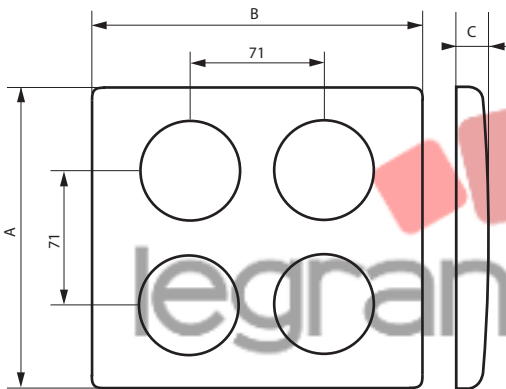

Cat. No 0 689 69

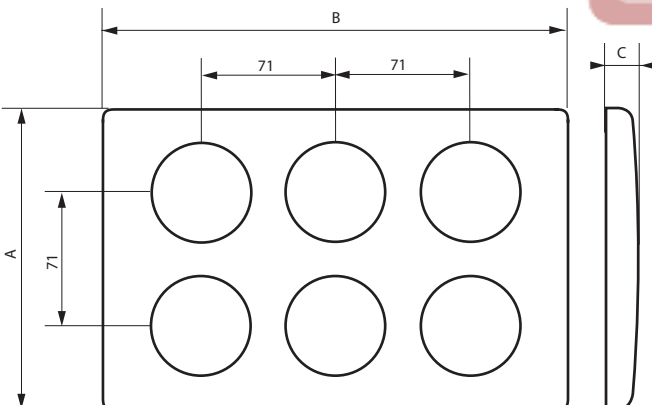

3. OVERALL DIMENSIONS (mm) (continued)

References	A	B	C
0 689 00	82	41	8.5
0 689 01/11/21/31/41/51	82	90	8.5
0 689 02/12/22/32/42/52	82	161	8.5
0 689 03/13/23/33/43/53	82	232	8.5
0 689 04/14/24/34/44/54	82	303	8.5
0 689 05/15/25/35/45/55	82	161	8.5
0 689 06/26/36	82	232	8.5
0 689 08/18/28/38/48/58	82	147	8.5
0 689 09/19/29/39/49/59	82	204	8.5
0 689 07	159	175	8.5
0 689 67	159	246	8.5
0 689 69	159	246	8.5

4. MOUNTING

The plates are clipped via notches to screw-type or claw-type supports (the notches are used to compensate for the thickness. Example: wall carpet). The plates are fitted with a protective film that is to be removed before use. Easy to remove with a screwdriver using the slots on the side of the plate

5. TECHNICAL DATA

■ 5.1 Mechanical characteristics

Impact tests: IK 04

■ 5.2 Material characteristics

Material: Aluminium + under-plate in polycarbonate or ABS except Cat. Nos. 0 689 00/68/69: plates ABS and Cat. No. 0 689 07: plate PC. Self-extinguishing: 650° C / 30 s

■ 5.3 Climatic characteristics

Storage temperatures: - 10° C to + 70° C
Operating temperatures: - 5° C to + 50° C

6. CLEANING

Surface cleaning with a cloth.
Do not use: acetone, tar remover, trichloroethylene.

■ 6.1 Resistance to cleaning substances

Resistance to the following products:
Hexane (EN 60669-1), Methylated spirits, Soapy water, Diluted ammonia, Diluted pure bleach 10%, Glass cleaning product, Pre-impregnated wipes.

■ 6.2 Resistance to hospital-type cleaning substances

Resistance to the following products:
Anios, Surfianios, Bactylsine, Hydrogen peroxide (oxygenated water 35%).

Caution: A preliminary test should be carried out if other specific cleaning products are to be used.

7. SPECIAL USE

The plates must not be painted.