


Optic Fibre Patch Cords Singlemode

Cat. No(s): 0 326 00/01/02/03/04/05/06/07/08/18/28/29/ 9 001 53/54/55

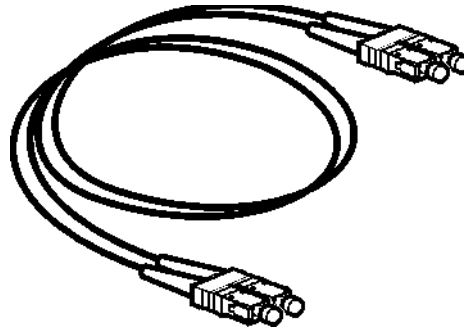

1. DESCRIPTION

Legrand optic fibre patchcords are suitable for low loss telecom, datacom, data centre and some critical applications. The patchcords provide flexible interconnection to active equipment, passive optical devices and cross-connects. The patchcords are terminated with ultra physical contact or angled physical contact, zirconia ferrule connectors which are manufactured with precision factory mounting and polishing techniques which helps assure high transmission quality.

OS1/OS2 Singlemode optical cords (9/125 µm)

Yellow sheaths

CAT. Nos	Designation	Length
0 326 00	SC/SC duplex cords	1 m
0 326 01		2 m
0 326 02		3 m
0 326 03	SC/LC duplex cords	1 m
0 326 04		2 m
0 326 05		3 m
0 326 28	LC/LC duplex cords	0,5 m
0 326 06		1 m
0 326 07		2 m
0 326 08		3 m
0 326 29		5 m
0 326 18	SC/SC APC simplex cord	2 m
9 001 53/54/55	All patchcords using LC, SC, LC APC or SC APC Std or HP, A to A or A to B	1 to 50 m

2. FEATURES / BENEFITS

- Conform to IEC, EIA-TIA, and Telecordia performances requirements
- RoHS, REACH & SvHC compliant

3. APPLICATIONS

- Data centre
- FTTX
- Telecommunication networks
- LAN and WAN
- Broadband network

4. CONNECTOR SPECIFICATION

OPTICAL PERFORMANCE	Std	HP	CONFORMANCE
IL MAX/Master (Acceptance)	0.25 dB	0.15 dB	IEC 61300-3-4
MAX IL/Random	0.40 dB	0.3 dB	IEC 61300-3-34
Ave/Master *	0.18 dB	0.12 dB	IEC 61300-3-4
Ave/Random *	0.18 dB	0.12 dB	IEC 61300-3-34
Return Loss	55 dB (UPC) / 65 dB (APC)		IEC 61300-3-6

* The change in attenuation for all the above listed criteria shall be a maximum of 0,20 dB

MECHANICAL PROPERTIES		CONFORMANCE
Mechanical endurance	500 matings	IEC 61300-2-2
Vibration	10-55 Hz, 0,75 amplitude	IEC 61300-2-1
Cable retention	Magnitude 50 N	IEC 61300-2-4
Cable torsion	1,5 kg for 2 mm cable diameter	IEC 613000-2-5

CONNECTOR TYPE	CONFORMANCE	
SC	IEC 61754-4	SM UPC - Blue with clips
LC	IEC 61754-20	SM UPC - Blue with clips
SC APC	IEC 61754-4	SM APC - Green with clips
LC APC	IEC 61754-20	SM APC - Green with clips

IMP : Please note that the LC 2 mm connectors will have heat shrinks to serve the purpose of cable retention.

Optic Fibre Patch Cords Singlemode

Cat. No(s): 0 326 00/01/02/03/04/05/06/07/08/18/28/29/ 9 001 53/54/55

5. CABLE SPECIFICATION

CHARACTERISTICS	UNITS	
Cable Material		LSZH
Strength Member		Aramid
Crush	N	1 000
Operating Temperature	° C	- 20 to + 60
Secondary Buffer Diameter	µm	900 ± 50
Sheat Diameter	mm	2
Minimum Bending Radius	mm	10 D (installed) 20 D (baded)

IMP : The patchcords are available in standard length of 1m, 2m, 3m, 5m, and 10m. For other lengthes, please contact your Legrand contact.

6. FIBRE SPECIFICATION

Fiber type : G 652 D IEC 60 793-2-50 type B1.3
G 657 A1 on demand IEC 60 793-2-50 type B6.A

CHARACTERISTICS	UNITS	
Attenuation	dB/km	0.38 @ 1310nm 0.25 @ 1550nm
Cromatic Dispersion	(ps/nm.km)	3.0 @ 1310nm 18.0 @ 1550nm

7. ON DEMAND

Legrand On Demand Department could offer on demand components :

- Other lengthes
- Standard or High Performance
- Consult your agency or local subsidiary