


**Forix™ IP 44
 Push-buttons**

Cat. No.(s): 7 823 64/84



7 823 64/84


1. USE

General lighting control mechanisms.
 Mechanisms with single, large rocker can be illuminated using lamp
 Cat. No. 7 823 98.

2. RANGE

Finishes		Designation
White	Grey	
7 823 64	7 823 84	One gang push-button

3. OVERALL DIMENSIONS

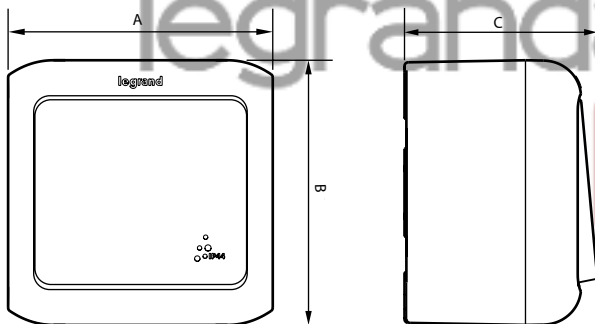

A	B	C
70	70	51

4. CONNECTION

Stripping: 10 mm
 Terminal type: with screws
 Terminal capacity up to: 2 x 2.5 mm²
 Recommended screwdriver size: pozidrive No. 2
 Recommended tightening torque: 0.5 Nm

5. TECHNICAL CHARACTERISTICS

■ **5.1 Mechanical characteristics**

Protection against liquids: IP 44
 Impact tests: IK 07

■ **5.2 Material characteristics**

Box: ABS
 Rocker: ABS
 Mechanism: PC
 Conduit gland: SEBS

■ **5.3 Electrical characteristics**

Voltage: 250 VAC
 Current: 6 A

■ **5.4 Climatic characteristics**

Storage and use temperature: - 25° C to + 60° C

6. CLEANING

Surface cleaning with a cloth.
 Do not use: acetone, tar remover, trichloroethylene.

Resistance to the following agents: Hexane (EN 60669-1), Methylated spirits, Soapy water, Diluted ammonia, Diluted pure bleached 10%, Glass cleaning substance, Pre-impregnated wipes.

Caution: A preliminary test should be carried out if other specific cleaning products are to be used.

7. ACCESSORIES

■ **7.1 Lamps**

Become illuminated with lamp Cat. No 7 823 98

■ **7.2 Spare membrane glands**

White membrane Cat. No 7 823 79
 Grey membrane Cat. No 7 823 99