


Céliane™ Flush-fit socket - German standard

Cat. Nos.: 0 671 66/67/68/69




1. DESCRIPTION

Flush-fit socket outlets 2 P+E, supplied with cover.
With protection eclips.
To be equipped with plate.

2. RANGE

Designation	White	Titanium	Graphite	Ivory
Flush-fit socket 2 P+E	0 671 66	0 671 67	0 671 68	0 671 69


3. OVERALL DIMENSIONS (mm)

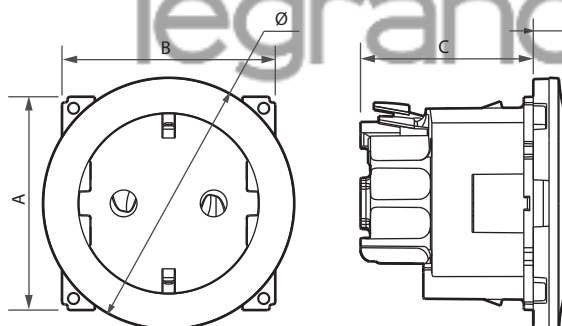

A	B	Ø	C	D
45	45	53	36.5	6.5

4. CONNECTION

Number of terminals: 3
Type of terminals: automatic
Terminal capacity: 2 x 2.5 mm²
Stripping length: 13 mm



5. TECHNICAL CHARACTERISTICS

■ 5.1 Protection class

Protection contre les corps solides et liquides : IP 20
Impact test : IK 04

■ 5.2 Material characteristics

Base: Polycarbonate
Cover: Polycarbonate
UV resistant
Halogen free

■ 5.3 Electrical characteristics

Self-extinguishing:
+ 850° C / 30 s for insulating parts holding live parts in place.
+ 650° C / 30 s for other parts made of insulating materials.

■ 5.4 Climatic characteristics

Voltage: 250 V~
Current: 16 A
Storage temperature: - 10° C to + 70° C
Operating temperature: - 5° C to + 50° C

6. CLEANING

Surface cleaning with a cloth.
Do not use: acetone, tar remover or trichloroethylene.

Resistance to the following products:

- Hexane (EN 60669-1), methylated spirit, soapy water, diluted ammonia, diluted pure bleach 10%, glass cleaning products, pre-impregnated wipes.
- Anios, Surfanos, Bactilysine, Hydrogen peroxide (35%).

Caution: A preliminary test should be carried out if other specific cleaning products are to be used.

7. STANDARDS AND APPROVALS

Compliant with installation and manufacturing standards.
See e-catalogue.