



Valena™

Cat. No(s): 7 741 20 - 7 742 20/60

2 P+E socket outlets - IP 44 German standard

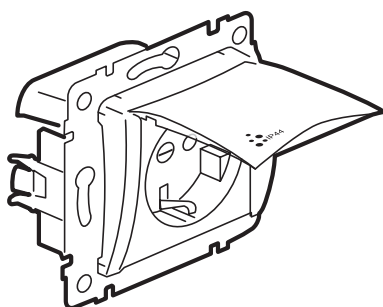

7 741 20 - 7 742 20



7 742 60

1. USE

Waterproof socket outlets, German standard.
Mechanisms supplied with:


- Support
- Cover plate

To be equipped with plate.

2. RANGE

Description	Ivory	White
2 P+E socket with shutters and flap cover	7 741 20	7 742 20
2 P+E socket key protected with shutters and flap cover	-	7 742 60

3. OVERALL DIMENSIONS (mm)

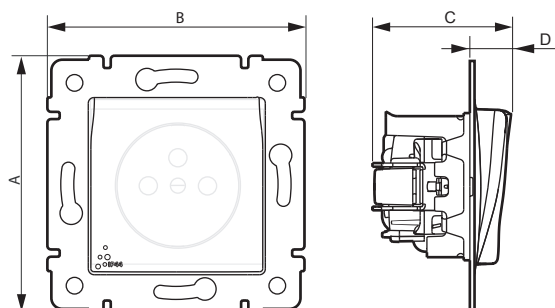

References	A	B	C	D
7 741 20 - 7 742 20	71	71	51	20
7 742 60	71	71	51	20

4. CONNECTION

Screw terminals

Capacity: 2 x 2.5 mm²

Stripping length: 10 mm

Compatible flexible or rigid cables.

5. TECHNICAL CHARACTERISTICS

■ 5.1 Mechanical characteristics

Protection against solid bodies and liquids: IP 44

Protection against impact: IK 04

■ 5.2 Material characteristics

Colour: - White RAL 9003 - Ivory RAL 1013

Material: - Membrane: PP

- Cover: PC (transparent)

- Cover plate (of the socket outlet): PC

- Halogen free

- UV resistant

Support: Zinc plated steel

Self-extinguishing:

+ 850° C / 30 s for insulating parts holding live parts in place

+ 650° C / 30 s for other parts made of insulating materials.

■ 5.3 Electrical characteristics

Voltage: 250 V~

Current: 16 A

Frequency: 50/60 Hz

■ 5.4 Climatic characteristics

Storage and usage temperature: - 5° C to + 40° C

6. MAINTENANCE

Clean the surface with a cloth.

Do not use acetone, tar-removing cleaning agents or trichloroethylene.

Resistance to the following cleaning substances:

- Hexane
- Methylated spirit
- Soapy water
- Diluted ammonia
- Diluted pure bleach 10%
- Glass cleaning product (Ethanol 1%, Butylglycol 6%)

Caution: A preliminary test should be carried out if other specific cleaning products are to be used.

7. ACCESSORIES

Key Cat. No 7 759 99

8. STANDARDS AND APPROVALS

Compliance with standards of installation and manufacturing.

Refer to e. catalogue.