



**Niloé™**  
**IP 44 Socket outlets**

Cat. Nos: 7 645 47 - 7 646 47 - 7 645 48 - 7 646 48

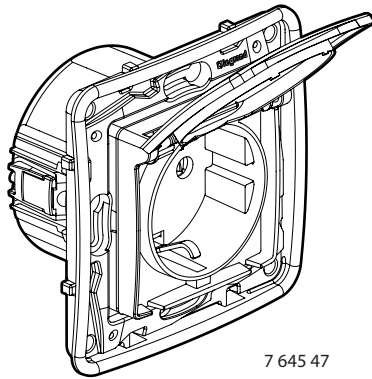

7 645 47

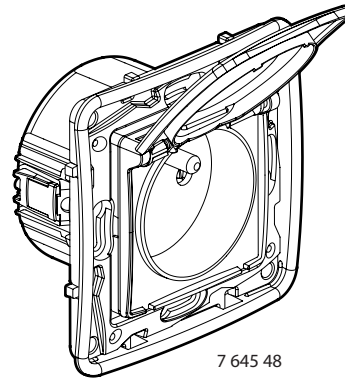

7 645 48


**1. USE**

2 P+E sealed socket outlets with shutters.  
 Supplied with cover plates and support frames.  
 To be fitted with single module or multi-module plates.  
 Screws or claws fixing.

**2. RANGE**

Designation	White	Ivory
2 P+E socket outlet - German standard To be equipped with plate	7 645 47	7 646 47
2 P+E socket outlet - Franco-Belgian standard To be equipped with plate	7 645 48	7 646 48

**3. DIMENSIONS (mm)**

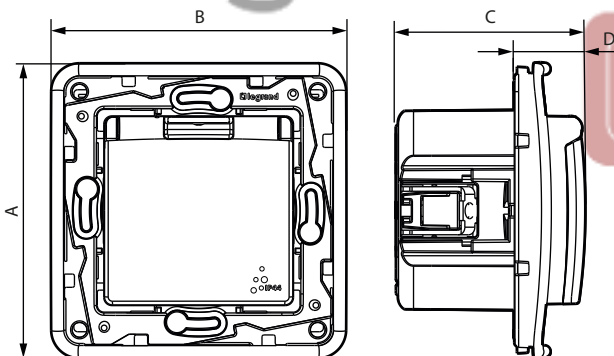

References	A	B	C	D
7 645 47 - 7 646 47	78	78	50	18
7 645 48 - 7 646 48	78	78	47	15

**4. CONNEXION**

Type of terminals: automatics  
 Terminals capacity: 2 x 2.5 mm<sup>2</sup>  
 Compatible flexible or rigid cables.  
 Stripping length: 13 mm

**5. TECHNICAL CHARACTERISTICS**

■ **5.1 Mechanical characteristics**

Protection against solid bodies and liquids: IP 44  
 Protection against impacts: IK 04

■ **5.2 Material characteristics**

Polyglass appearance

Colour: - White RAL 9003  
 - Ivory RAL 1013

Material: - Cover plates: PC  
 - Halogen free  
 - UV resistant

Material of the support: - PC grey RAL 7037 + 10 % glass fiber  
 - Halogen free

Self-extinguishing:  
 + 850° C / 30 s for insulating parts holding live parts in place  
 + 650° C / 30 s for other parts made of insulating materials

■ **5.3 Electrical characteristics**

Voltage: 250 V~  
 Current: 16 A  
 Frequency: 50/60 Hz

■ **5.4 Climatic characteristics**

Storage temperature: - 10° C to + 70° C  
 Use temperature: - 5° C to + 35° C

**6. CLEANING**

Surface cleaning with a cloth.  
 Do not use: acetone, tar remover, trichloroethylene.

Resistance to the cleaning agents: Hexane (NF C 61-314), Methylated spirit, Soapy water, Diluted ammonia, Diluted pure bleach 10%, Glass cleaning substances, Pre-impregnated wipes.

**Caution:** A preliminary test should be carried out if other specific cleaning products are to be used.

**7. STANDARDS AND APPROVALS**

Compliance with standards of installation and manufacturing.  
 See e.catalogue