


# Niloé™ LED lamp


Cat. No(s): 7 645 21/23

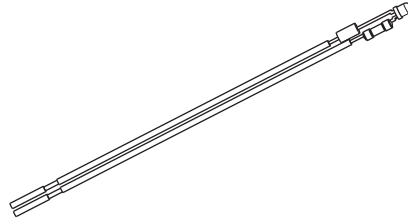


## 1. USE

Illuminated and signalling indicators.  
 Connection by direct mounting with lamp (LED).

## 2. RANGE

	Illuminated and signalling indicator 230 V with white LED	7 645 21
	Illuminated and signalling indicator 12/24 V with white LED	7 645 23

## 3. DIMENSIONS (mm)

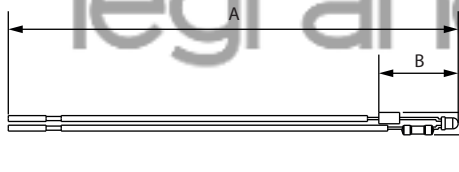

Cat. Nos	A	B	C
7 645 21/23	129	12	5

## 4. CONNECTION

2 wires

## 5. TECHNICAL CHARACTERISTICS

### ■ 5.1 Material characteristics

Halogen free  
 LED: White

### ■ 5.2 Electrical characteristics

Cat. Nos	Voltage	Consumption
7 645 21	230 V	2.5 mA
7 645 23	12 V	1 mA
	24 V	2.5 mA

### ■ 5.3 Climatic characteristics

Use and storage temperature: - 5° C to + 35° C

## 6. CLEANING

Surface cleaning with a cloth.

## 7. STANDARDS AND APPROVALS

Compliant with installation and manufacturing standards.  
 See e-catalogue.