legrand®

128, av. du Maréchal-de-Lattre-de-Tassigny - 87045 LIMOGES Cedex
Tel.: 0 (+33) 5 55 06 87 87 - Fax: 0 (+33) 5 55 06 88 88
www.legrand.com

Valena™ Life
Connected Wake up/Sleep wireless control

Cat. Nos: 7 521 89 - 7 522 89 - 7 523 89
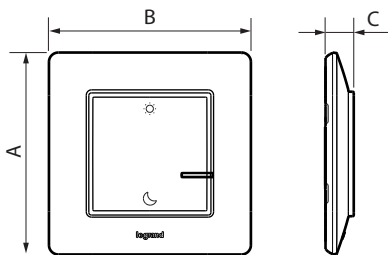
1/2

1. USE

Used to control wake up/sleep scenes involving lights, roller shutters and connected sockets.
• Fixes directly on the wall or screws onto a flush-mounting box.
  Multi-gang versions can be combined with other wiring accessories.
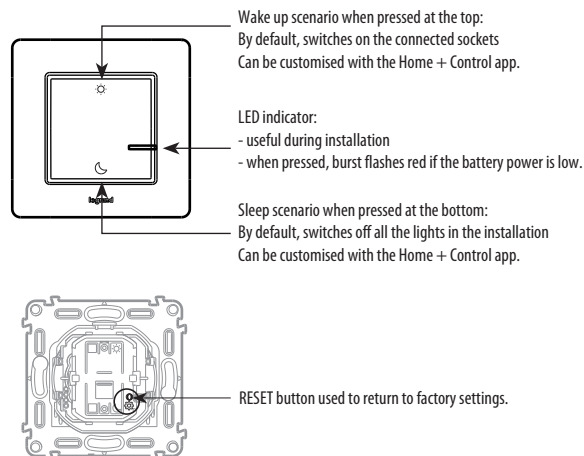• Fits on a piece of furniture (movable).

2. RANGE

Description	White	Ivory	Aluminium
Wake up/Sleep wireless control, with battery. Supplied complete. Equipped with an LED indicator (configuration) and a RESET button (hidden) used to return to factory settings. Repositionable self-adhesive fixings supplied.	7 521 89	7 522 89	7 523 89

3. DIMENSIONS

A	B	C
86	86	12

4. OPERATION

Wake up scenario when pressed at the top:
By default, switches on the connected sockets
Can be customised with the Home + Control app.

LED indicator:
- useful during installation
- when pressed, burst flashes red if the battery power is low.

Sleep scenario when pressed at the bottom:
By default, switches off all the lights in the installation
Can be customised with the Home + Control app.

RESET button used to return to factory settings.

5. TECHNICAL CHARACTERISTICS

■ 5.1 Mechanical characteristics
Protection against impacts: IK 02
Protection against solid bodies/liquids:
 - IP 20 without plate and rocker plate
 - IP 40 for assembled product

■ 5.2 Material characteristics
Plate: ABS - Sub-plate: PC
Rocker plate: ABS
Colours: White RAL 9003 - Ivory: RAL 1013
         Aluminium
Mechanism with grid: Fibreglass-reinforced (10 %) PC

Halogen-free
UV resistant

Self-extinguishing: 650°C/30 s

■ 5.3 Electrical characteristics
Powered by a CR2032 - 3 V lithium battery (supplied)
Battery life: 8 years for 10 activations a day
ZigBee radio technology frequency: 2.4 GHz to 2.4835 GHz
Wireless mesh network, self-adaptive and secure (AES 128), conforming to standard IEEE 802.15.4 (LR-WPAN)
Power level: < 100 mW

■ 5.4 Climate characteristics
Usage temperature: + 5° C to + 45° C
Storage temperature: 0° C to + 45°

2/2

6. CARE

Clean the surface with a cloth.
Do not use acetone, tar-removing cleaning agents or trichloroethylene.

Resistant to the following products: Hexane (EN 60669-1), methylated spirit, soapy water, diluted ammonia, bleach diluted to 10%, window-cleaning products, pre-impregnated wipes.

Caution: Always test before using special cleaning products.

The plates must not be painted.

⚠ Take care to recycle the battery appropriately

7. ACCESSORIES

0 648 71: Repositionable adhesive for wireless control (x 4 supplied)

8. STANDARDS AND APPROVALS

The undersigned, LEGRAND, declares that the radio-electric equipment type (7 521 89 - 7 522 89 - 7 523 89) complies with directive 2014/53/EU. The full text of the EU declaration of conformity is available on the following website: **www.legrandoc.com**