


Valena™ Life

Connected 2-gang ON/OFF wireless control for lighting and sockets

Cat. Nos: 7 521 87 - 7 522 87 - 7 523 87 - 7 563 87



1. USE

Wireless control for 2 ON/OFF light functions or connected socket. Controls micromodule products, connected sockets and connected dimmer switches.

Can be used as a two-way switch or to control a lighting group.

- Fixes directly on the wall or screws onto a flush-mounting box.
- Multi-gang versions can be combined with other wiring accessories.
- Fits on a piece of furniture (movable).

Can control up to 2 x 20 micromodules, connected sockets, connected dimmer switches

2. RANGE

2-gang wireless lighting and socket control for an ON/OFF, dimmer, centralisation function.


Supplied complete with battery.

With LED indicator (configuration) and RESET button (hidden) used to return to factory settings.

Repositionable self-adhesive fixings supplied.


White	Ivory	Alu	Black
7 521 87	7 522 87	7 523 87	7 563 87

3. DIMENSIONS (mm)

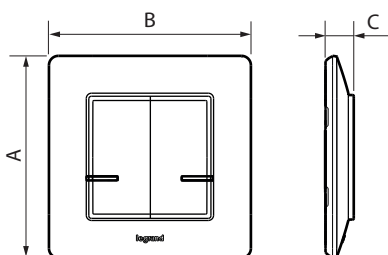

A	B	C
86	86	12


4. OPERATION



Short press: ON/OFF
 Long press: dimming +

LED indicators:
 - useful during installation
 - when pressed, burst flash red if the battery power is low

Short press: ON/OFF
 Long press: dimming -



RESET button used to return to factory settings

5. TECHNICAL CHARACTERISTICS

■ 5.1 Mechanical characteristics

Protection against impacts: IK 02

Protection against solid bodies/liquids: IP 20 without plate or rocker plate
 IP 40 for assembled product

■ 5.2 Material characteristics

Plate: ABS

Sub-plate: PC

Rocker plate: ABS

Mechanism with grid: Fibreglass-reinforced (10%) PC

Halogen-free

UV-resistant

Self-extinguishing: 650°C/30 s

■ 5.3 Electrical characteristics

Powered by a CR2032 - 3 V lithium battery (supplied)

Battery life: 8 years for 10 activations a day

ZigBee radio technology

Frequency bands: 2.4 GHz to 2.4835 GHz

Power level: < 100 mW

■ 5.4 Climate characteristics

Usage temperature: + 5°C to + 45°C

Storage temperature: 0°C to + 45°C

6. CARE

Clean the surface with a cloth.
Do not use acetone, tar-removing cleaning agents or trichloroethylene.

Resistant to the following products: Hexane (EN 60669-1), methylated spirit, soapy water, diluted ammonia, bleach diluted to 10%, window-cleaning products, pre-impregnated wipes.

Caution: Always test before using special cleaning products.

The plates must not be painted.



Take care to recycle the battery appropriately

7. ACCESSORIES

0 648 71: Repositionable adhesive for wireless control (x 4 supplied)

8. STANDARDS AND APPROVALS

The undersigned, LEGRAND, declares that the radio-electric equipment type (7 521 87 - 7 522 87 - 7 523 87 - 7 563 87) complies with directive 2014/53/EU.

The full text of the EU declaration of conformity is available on the following website: www.legrandoc.com