



# Incara™ Vertebra

Cat. No(s): 6 549 90/91/92/93



6 549 90/91

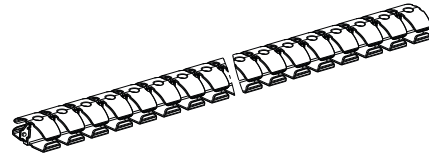

6 549 92/93

## 1. USE

Incara™ Vertebra manage and organize vertical flow of cables and cords between the desk and the floor as well as horizontal cable distribution directly under the worktop.


## 2. RANGE

Description	Colors	Cat. Nos
4 Compartments 0,8 m	grey	6 549 90
	black	6 549 91
2 Compartments 1,2 m	grey	6 549 92
	black	6 549 93

## 3. DIMENSIONS


### ■ 3.1 Overall dimensions

#### Incara™ Vertebra 4 compartments



A	54
B	54

#### Incara™ Vertebra 2 compartments



A	54
B	27

## 3. TECHNICAL CHARACTERISTICS (cont.)


### ■ 3.2 Cabling capacities

The cable capacities are valid for a straight line, in case of curvature the capacities may be reduced


		Section (mm <sup>2</sup> )	430 mm <sup>2</sup>	410 mm <sup>2</sup>
cable Ø	Ø 7		6	6
	Ø 9		4	4
	Ø 11		2	2

### ■ 3.3 Radius of curvature (mm)

#### Incara™ Vertebra 4 compartments




R1	80 mini
----	---------




R2	80 mini
----	---------

#### Incara™ Vertebra 2 compartments



R1	50 mini
----	---------





R2	80 mini
----	---------

Vertebra



4. INSTALLATION

- 4.1 Incara™ Vertebra 4 compartments
- 4.1.1 Installation using 60 to 80 mm diameter grommet

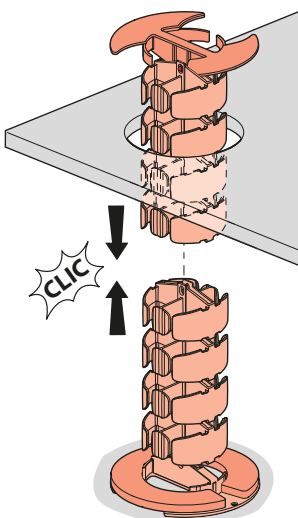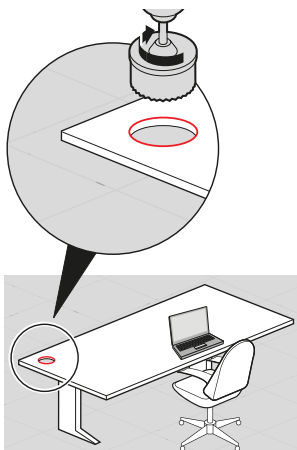

4. INSTALLATION (cont.)


- 4.1 Incara™ Vertebra 4 compartments
- 4.1.2 Fixing under desk surface

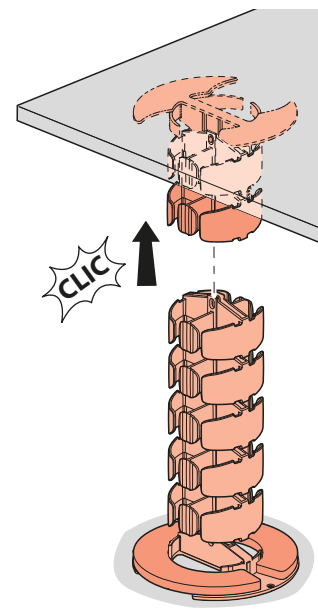


#### 4. MISE EN SITUATION (cont.)

##### ■ 4.2 Incara™ Vertebra 2 compartments

###### 4.2.1 Rigid position

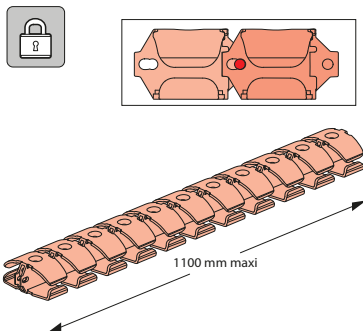


###### 4.2.2 Flexible position

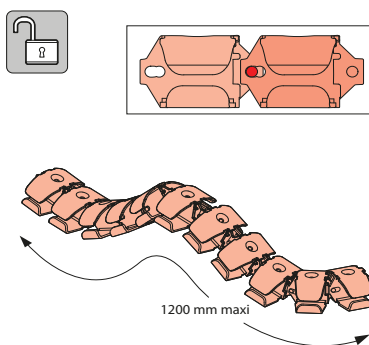


##### 4.2.3 Fixing

###### 4.2.3.1 with screw Ø 3,5mm maxi (not included)



###### 4.2.3.2 with double-sided adhesive (included)

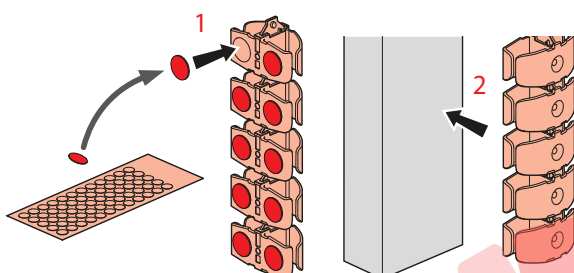

Recommended installation temperature : from +15°C to +25°C

#### 5. GENERAL CHARACTERISTICS

##### ■ 5.1 Mechanical characteristics

Incara™ Vertebra 2 compartments can be used on floor.  
Resistance to impact: IK 07

##### ■ 5.2 Material characteristics

4 & 2 cpts Vertebra: black RAL 9017 & grey RAL 7035 ABS  
4 cpts end caps for Vertebra: black RAL 9017 & grey RAL 7035 PA6  
4 cpts ballast: Steel (0,260kg)

##### ■ 5.3 Electrical characteristics

no electrical continuity

##### ■ 5.3 Climate characteristics

Operating temperature: from -5°C to +35°C  
Storage temperature: from -10°C to +70°C

#### 6. CLEANING

Superficial cleaning with a soft cloth. Do not use abrasive products or detergents.

**Caution:** Always test before using other special cleaning products

#### 7. STANDARDS & APPROVALS

Classification according to IEC 62549 ( 2011-10 ) Hinged and flexible cable management systems