



### LEGRAND'S ENVIRONMENTAL COMMITMENTS

• **Incorporate environmental management into our industrial sites**

Of all Legrand sites worldwide, over 80% are ISO 14001-certified [sites belonging to the Group for more than five years].

• **Involve the environment in product design**

Provide our customers with all relevant information (composition, consumption, end of life, etc.).

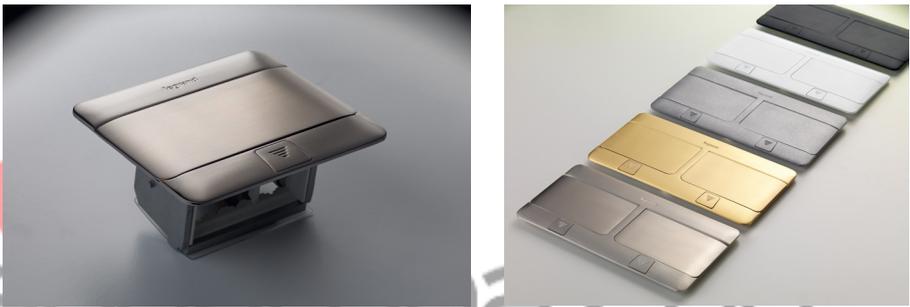
Reduce the environmental impact of products over their whole life cycle.

• **Offer our customers environmentally friendly solutions**

Develop innovative solutions to help our customers design more energy efficient, better managed and more environmentally friendly installations.



### REFERENCE PRODUCT

<b>Function</b>	Connect a workstation remote from the wall, from a concrete or raised access floors or directly from the furniture (desks, meeting room tables, etc), to the energy and communication networks for 20 years, via 2x3 modules Mosaic or Arteor sockets outlets..
<b>Reference Product</b>	
Cat.No 0 540 12 <b>POP-UP BOX TO BE EQUIPPED - 2 X 3 MODULES - MATT ALUMINIUM FINISH.</b>	

The company reserves the right to change specifications and designs without notice. All illustrations, descriptions, dimensions and weights in the document are for guidance and cannot be held binding on the company.



### PRODUCTS CONCERNED

The environmental data are representative of the following products:

<b>Catalogue Numbers</b>
• 0 540 10
• 0 540 11
• 0 540 12
• 0 540 13
• 0 540 26
• 0 540 28
• 0 540 31
• 0 540 33



### ■ CONSTITUENT MATERIALS

This Reference Product contains no substances prohibited by the regulations applicable at the time of its introduction to the market.  
It contains no substances covered by the RoHS directive (2002/95/EC and its revision 2011/65/EC)  
It contains none of the 138 substances of the candidate list of the REACH regulation dated 19/12/2012.

<b>Total weight of Reference Product</b>		<b>799 g</b> (with unit packaging)			
Plastics as % of weight		Metals as % of weight		Other as % of weight	
PC	4,5 %	Al	41,9 %	Cables/electric wires	1,9 %
PVC	1,5 %	Steel	17,0 %		
Other plastics	0,2 %	Zamak	16,4 %		
POM	0,2 %	Copper alloys	0,3 %		
				Packaging as % of weight	
				Paper	15,4 %
				PE	0,8 %
<b>Total plastics</b>	<b>6,4 %</b>	<b>Total metals</b>	<b>75,5 %</b>	<b>Total other and packaging</b>	<b>18,1 %</b>

Estimated recycled material content: 64 % of weight.



### ■ MANUFACTURE

This Reference Product comes from a site that observes the applicable legislation for industrial sites.



### ■ DISTRIBUTION

Products are distributed from logistics centres located with a view to optimize transport efficiency. The Reference Product is therefore transported over an average distance of 920 km by road and 5958 km by sea from our warehouse to the local point of distribution into the market all around the world.

Packaging is compliant with applicable regulation. At their end of life the recyclability rate is 95 % (in % of packaging weight).



### ■ INSTALLATION

Installation components not delivered with the product are not taken into account.



### ■ USE

#### ■ Servicing and maintenance:

under normal conditions of use, this type of product requires no servicing or maintenance.

#### ■ Consumable:

no consumables are necessary to use this type of product.



### END OF LIFE

Product end of life management is integrated into product design by the development teams. The disassembly and sorting of components or materials is made as easy as possible with a view to recycling or another form of reuse.

• **Recyclability rate:**

Calculated using the method described in technical report IEC/TR 62635, the recyclability rate of the product is estimated at 97 %. This value is based on data collected from a technological channel operating on an industrial basis. It does not prejudice the effective use of the channel for electrical and electronic products at the end of their life.

Separated into:

- plastic materials (excluding packaging) : 6 %
- metal materials (excluding packaging) : 75 %
- other materials (excluding packaging) : 1 %
- packaging (all types of materials) : 15 %



### ENVIRONMENTAL IMPACTS

The evaluation of environmental impacts examines the stages of the Reference Product life cycle: manufacturing, distribution, installation, use and end-of-life. It is representative from worldwide marketed products.

The following modelling elements were taken into account:

<b>Manufacture</b>	Unit packaging taken into account. As required by the "PEP ecopassport" programme all transport for the manufacturing of the Reference Product, including materials and components, has been taken in account.
<b>Distribution</b>	Transport between the last Group distribution centre and an average delivery to the sales area.
<b>Installation</b>	Installation components not delivered with the product are not taken into account.
<b>Use</b>	<ul style="list-style-type: none"> <li>• Under normal conditions of use, this type of product requires no servicing or maintenance.</li> <li>• No consumables are necessary to use this type of product.</li> <li>• Product category: PSR-0003-ed1-EN-2012 02 02 «Cable management solutions».</li> <li>• Use scenario: no energy consumption during the 20 years working life. This modelling duration does not constitute a minimum durability requirement.</li> <li>• Energy model: Electricity (China) - 2009</li> </ul>
<b>End of life</b>	In view of the data available on the date of creation of the document, and in accordance with the requirements of the PCR of the «PEP ecopassport» programme, transport of the Reference Product by road only once, over a distance of 1000 km, to a processing site at end of life was counted..
<b>Software used</b>	EIME V5 & Database version: Legrand_2012_10_31_version_3, made from the database CODDE-2012-07.



### ENVIRONMENTAL IMPACTS (continued)

		Total for Life cycle		Raw material and manufacture		Distribution		Installation		Use		End of life	
Mandatory indicators	Global warming	3,84E+03	g~CO <sub>2</sub> eq.	3,65E+03	95%	1,24E+02	3%	0,00E+00	0%	0,00E+00	0%	6,07E+01	2%
	Ozone depletion	3,38E-04	g~CFC-11 eq.	2,33E-04	69%	6,17E-05	18%	0,00E+00	0%	0,00E+00	0%	4,31E-05	13%
	Water eutrophication	2,23E-01	g~PO <sub>4</sub> <sup>3-</sup> eq.	2,20E-01	99%	1,45E-03	< 1%	0,00E+00	0%	0,00E+00	0%	1,01E-03	< 1%
	Photochemical ozone creation	2,09E+00	g~C <sub>2</sub> H <sub>4</sub> eq.	1,96E+00	94%	7,62E-02	4%	0,00E+00	0%	0,00E+00	0%	5,28E-02	3%
	Air acidification	7,76E-01	g~H+ eq.	7,24E-01	93%	4,34E-02	6%	0,00E+00	0%	0,00E+00	0%	8,03E-03	1%
	Total energy depletion	5,82E+01	MJ	5,63E+01	97%	1,10E+00	2%	0,00E+00	0%	0,00E+00	0%	7,69E-01	1%
	Water depletion	1,67E+01	dm <sup>3</sup>	1,65E+01	99%	1,05E-01	< 1%	0,00E+00	0%	0,00E+00	0%	7,30E-02	< 1%

Optional indicators	Raw material depletion	1,08E-15	year <sup>-1</sup>	1,07E-15	100%	1,50E-18	< 1%	0,00E+00	0%	0,00E+00	0%	1,05E-18	< 1%
	Air toxicity	1,06E+06	m <sup>3</sup>	9,90E+05	93%	5,71E+04	5%	0,00E+00	0%	0,00E+00	0%	1,19E+04	1%
	Water toxicity	1,16E+00	m <sup>3</sup>	1,14E+00	98%	1,22E-02	1%	0,00E+00	0%	0,00E+00	0%	8,48E-03	< 1%
	Hazardous waste production	2,01E-01	kg	2,01E-01	100%	3,30E-05	< 1%	0,00E+00	0%	0,00E+00	0%	2,26E-05	< 1%

The environmental impacts of the Reference Product are representative of the products covered by the PEP, which therefore constitute a homogeneous environmental family. The environmental impact of the system, described in this document and different of the Reference Product, can be estimated by weighting the environmental impacts of the Reference Product by the corresponding factors (see p.5/5).

The values of these impacts are valid for the context specified in this document. They must not be used directly to draw up the environmental balance sheet for the installation.



### ENVIRONMENTAL IMPACTS (continued)

Designation	Correction factor to apply to each indicators, for each life cycle step or to the total life cycle
Pop-up 3 mod (Alu, Black, White finishes)	0,54
Pop-up 4 mod (Alu, Black, White finishes)	0,58
<b>Pop-up 6 mod (Alu, Black, White finishes)</b>	<b>1,00</b>
Pop-up 8 mod (Alu, Black, White finishes)	1,10



Registration number: LGRP-2014-030-V1-EN	Drafting rule: PCR : PEP-PCR-ed 2.1-FR-2012 12 11 supplemented by PSR : PSR0003-ed1-FR-20120202
Authorisation number of checker: VH02	Programme information: <a href="http://www.pep-ecopassport.org">www.pep-ecopassport.org</a>
Date of issue: 07-2014	Validity period: 4 years
Independent verification of the declaration and data, in accordance with ISO 14025:2006 Internal <input checked="" type="checkbox"/> External <input type="checkbox"/>	
In accordance with ISO 14025:2006 Type III environmental declaration	
The critical review of the PCR was conducted by a panel of experts chaired by J.Chevalier (CSTB)	
The elements of the present PEP cannot be compared with elements from another programme	

