



Valena™ Plates Aluminium finish

Cat. No(s): 7 701 51/52/53/54/55/56/57 - 7 703 31/32/33/34/35/36/37
7 703 41/42/43/44/45/46/47/51/52/53/54/55/56/57
7 703 71/72/73/74/75/76/77/91/92/93/94/95/96/97



7 701 51

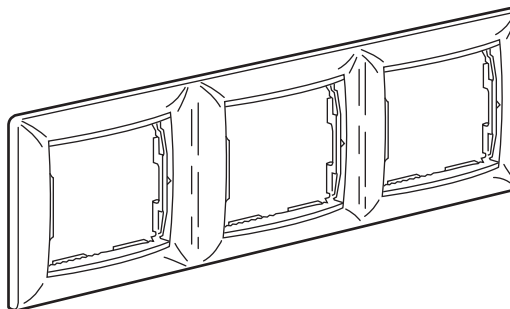

7 701 53

1. USE

Face plates for Valena : 1 - 2 - 3 - 4 and 5-gang wiring accessories.
Available in several colours.
Can be transformed in vertical or horizontal plate by rotation of internal trim.


2. RANGE

1-gang plates - Horizontal



■ Aluminium	7 701 51
■ Aluminium Silver	7 703 51
■ Dark Wood Silver	7 703 71
■ Black Silver	7 703 91
■ Brushed Alu	7 703 31
■ Cubist Alu	7 703 41

2-gang plates - Horizontal




■ Aluminium	7 701 52
■ Aluminium Silver	7 703 52
■ Dark Wood Silver	7 703 72
■ Black Silver	7 703 92
■ Brushed Alu	7 703 32
■ Cubist Alu	7 703 42

2-gang plates - Vertical



■ Aluminium	7 701 56
■ Aluminium Silver	7 703 56
■ Dark Wood Silver	7 703 76
■ Black Silver	7 703 96
■ Brushed Alu	7 703 36
■ Cubist Alu	7 703 46

3-gang plates - Horizontal



■ Aluminium	7 701 53
■ Aluminium Silver	7 703 53
■ Dark Wood Silver	7 703 73
■ Black Silver	7 703 93
■ Brushed Alu	7 703 33
■ Cubist Alu	7 703 43


3-gang plates - Vertical



■ Aluminium	7 701 57
■ Aluminium Silver	7 703 57
■ Dark Wood Silver	7 703 77
■ Black Silver	7 703 97
■ Brushed Alu	7 703 37
■ Cubist Alu	7 703 47


2. RANGE (continued)

4-gang plates - Horizontal / Vertical (§ 4.2)




■ Aluminium	7 701 54
■ Aluminium Silver	7 703 54
■ Dark Wood Silver	7 703 74
■ Black Silver	7 703 94
■ Brushed Alu	7 703 34
■ Cubist Alu	7 703 44

5-gang plates - Horizontal



■ Aluminium	7 701 55
■ Aluminium Silver	7 703 55
■ Dark Wood Silver	7 703 75
■ Black Silver	7 703 95
■ Brushed Alu	7 703 35
■ Cubist Alu	7 703 45

3. OVERALL DIMENSIONS (mm)

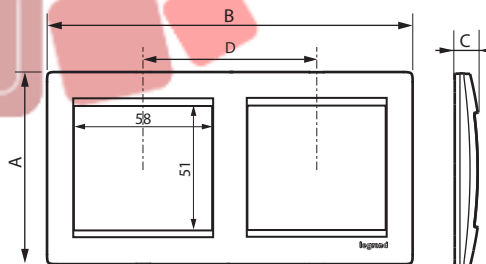


	A	B	C	D
1-gang	86	86	11	-
2-gang	86	157	11	71
3-gang	86	228	11	71
4-gang	86	299	11	71
5-gang	86	370	11	71


4. MOUNTING

■ 4.1 Plates

Easy to remove with a screwdriver using the slots on the side of the plate.



■ 4.2 Trims

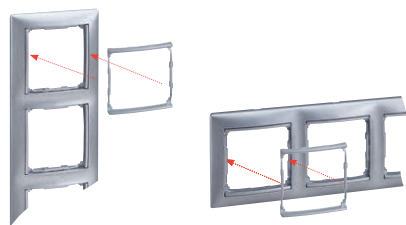

Necessary to reposition the trims in 4 and 5 gang installations.
If you need to install the plates horizontally it's necessary to remove the trims and reposition them.

5. TECHNICAL CHARACTERISTICS

■ 5.1 Mechanical characteristics

Impact tests: IK 04

■ 5.2 Material characteristics

Material: Polycarbonate

Aluminium RAL 7040 (closest color), water based paint

Halogen free

UV resistant

Self-extinguishing: 650° C / 30 s

■ 5.2 Climatic characteristics

Storage and usage temperature: - 5° C to + 40° C

6. CLEANING

Clean the surface with a cloth.

Do not use acetone, tar-removing cleaning agents or trichloroethylene.

Resistance to the following cleaning substances:

- Hexane (EN 60669-1)
- Methylated spirit
- Soapy water
- Diluted ammonia
- Diluted pure bleach 10%
- Glass cleaning product (Ethanol 1%, Butylglycol 6%)

Caution: An initial test is required for the use of other special maintenance products.

7. SPECIAL USE

The plates must not be painted.