



Platinum

Receptacle for socket outlets or other wiring devices


Cat. No(s): 0 897 00/01/02/10/11/12

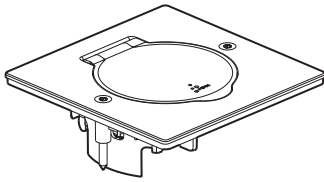

0 897 00/10



0 897 01/11

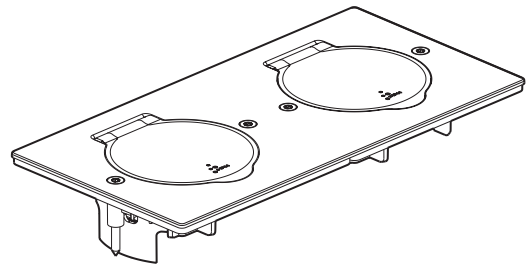

0 897 02/12

1. USE


Range of square, rectangular or round units for receiving floor sockets, supplied empty (to be fitted with mains voltage or ELV connections).
 For 45 x 45 functions

2. RANGE


Description	Stainless steel	Golden brushed
Receptacles for square floor sockets	0 897 00	0 897 10
Receptacles for round floor sockets	0 897 01	0 897 11
Receptacles for rectangular floor socket	0 897 02	0 897 12

3. POSITIONING

- 3.1 For fixing to wall or furniture (e.g.: work surface) using Batibox Cat. No. 0 801 88




- 3.2 Batibox Cat. No. 0 819 88

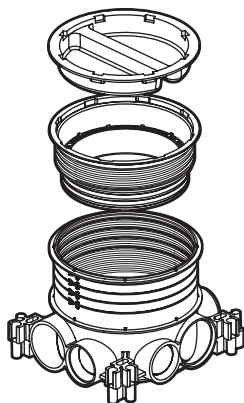


4. DIMENSIONS (mm)


- Cat. No. 0 897 00/10

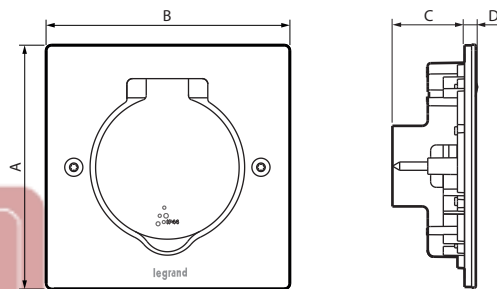

- Cat. No. 0 897 01/11

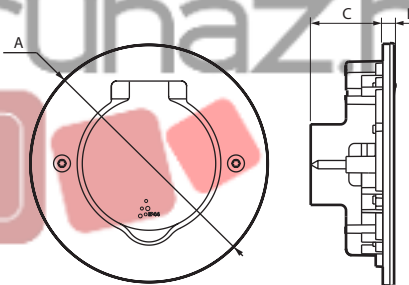


- Cat. No. 0 897 02/12

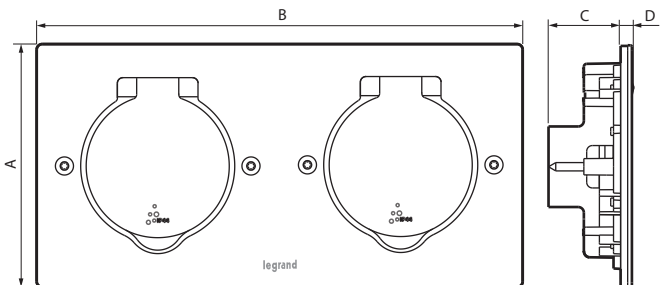


References	A	B	C	D
0 897 00/10	86	86	28	2
0 897 01/11	90	-	28	2
0 897 02/12	86	172	28	2

4. DIMENSIONS (mm) (continued)

■ Cat. No 0 819 88

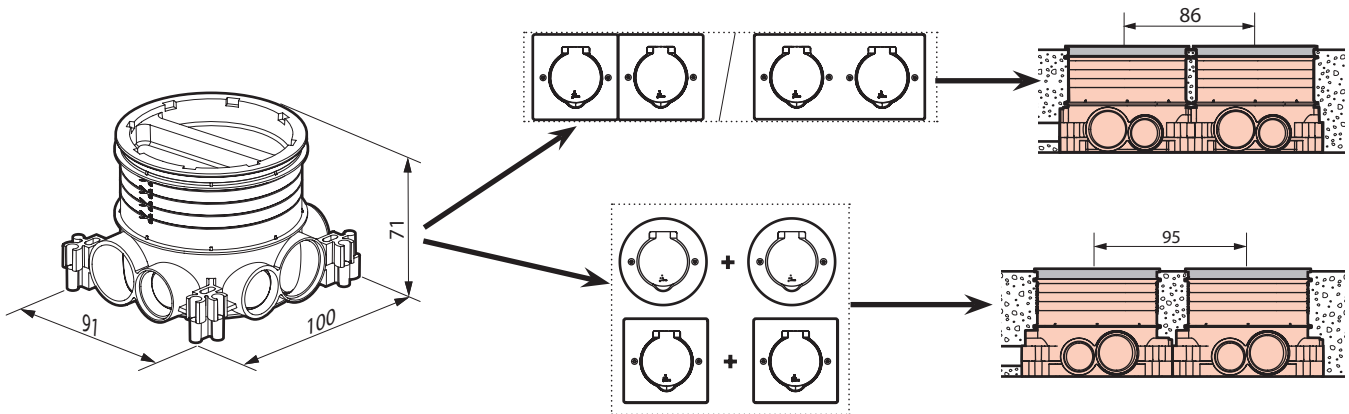

■ Batibox Cat. No 0 801 88

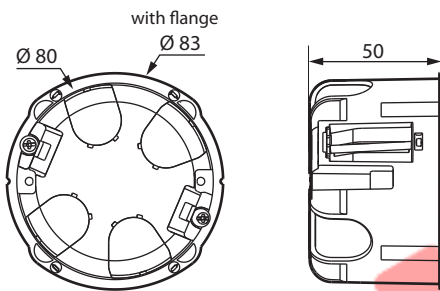

5. RECOMMENDATIONS

- For installing indoors or outdoors (in a protected unit).
- Essential requirement: Install the «small plugs» behind the plate if installing the socket using box Cat. No. 0 801 88.
- White indicator: Illuminated accessibility markings.

6. TECHNICAL CHARACTERISTICS

■ **6.1 Protection class**

IP 44 } Cover closed
 IK 08 }
 Cover can open 180°

■ **6.2 Material characteristics**

Stainless steel or Golden brushed

Material: Zamak

Fixing screws: stainless steel Torx T10

Self-extinguishing:

- + 850°C / 30 s for insulating parts holding live parts in place
- + 650°C / 30 s for other parts made of insulating materials

■ **6.3 Climatic characteristics**

Storage temperature: - 10° C to + 60° C

Use temperature: - 5° C to + 50° C

7. CLEANING

Do not use detergents.

8. ACCESSORIES

Cat. No. 0 819 88: Single multi-material floor box, for concrete depth of 50 to 80 mm

Cat. No. 0 897 19: Indicator light for floor socket - 230 V - 1 mA

Cat. No. 0 897 09: Long screws (x 10)

Cat. No. 0 800 88: Hole saw Ø 80

Cat. No. 0 801 88: Batibox box